

FICHE TECHNIQUE

Borne Gamma

Modèle BG5FAE913211645

Borne Gamma 10W 870Lm Ø80*H360mm Sol IP65 IK08 360° 3000K

Code GTIN : 3760276637214



Sur commande



Nouveauté



Photo(s) non contractuelle(s).
L'apparence du produit peut être amenée à être modifiée.

Informations principales

Réf.	BG5FAE913211645
Marque	PIXEL Lighting
Nom produit	Borne Gamma
Type	Éclairage extérieur
Catégorie	Borne Lumineuse
Sous-catégorie	Gamma
Application(s)	Urbain, Extérieur
Variante(s)	12 variantes
Coloris	Anthracite
Dimensions	Ø80 * H360 mm
Dimensions d'installation	-
Poids	1600g


Données techniques

Puissance	10 W
Flux lumineux	870 LM
Rendement	87 LM/W
Angle de diffusion	360°
Température de couleur	3000K
Type de montage	Sol
Type de LED	SMD3030
Type de diffuseur / réflecteur	Lentille
Type de driver	CE
Usage intensif	Non
Température fonctionnement	-20° à +40° C

Normes



Performances luminaire

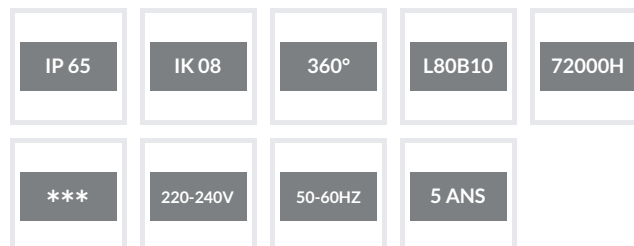

Caractéristiques

650°



COMPATIBLE
 DÉTECTION

DI

SDCM<3

IRC 80



THD <16%

PF 0.9

Variantes

Réf.	Puissance en W	Flux lumineux en LM	Rendement en LM/W	Angle en °	Dimensions en mm	Type de montage	Température couleur en K	IP	IK	Durée de vie en H	L / B	Classe
BK5FAE8F0EC546D	5	250	50	180°	Ø80 * H360	Sol	3000K	65	08	72000	L80B10	I
BG5FAE90BCAEF3A	5	260	52	180°	Ø80 * H360	Sol	4000K	65	08	72000	L80B10	I
BG5FAE8866A5239	5	265	53	90°/90°	Ø80 * H360	Sol	3000K	65	08	72000	L80B10	I
BG5FAE892DECB3	5	275	55	90°/90°	Ø80 * H360	Sol	4000K	65	08	72000	L80B10	I
BG5FAE85ADA963C	5	435	87	360°	Ø80 * H360	Sol	3000K	65	08	72000	L80B10	I
BG5FAE8748BE30F	5	450	90	360°	Ø80 * H360	Sol	4000K	65	08	72000	L80B10	I
BG5FAE931DF376C	10	500	50	180°	Ø80 * H360	Sol	3000K	65	08	72000	L80B10	I
BG5FAE938837BE9	10	520	52	180°	Ø80 * H360	Sol	4000K	65	08	72000	L80B10	I
BG5FAE9209D3F66	10	530	53	90°/90°	Ø80 * H360	Sol	3000K	65	08	72000	L80B10	I
BG5FAE92A82536C	10	550	55	90°/90°	Ø80 * H360	Sol	4000K	65	08	72000	L80B10	I
BG5FAE913211645	10	870	87	360°	Ø80 * H360	Sol	3000K	65	08	72000	L80B10	I
BG5FAE919D4D8F6	10	900	90	360°	Ø80 * H360	Sol	4000K	65	08	72000	L80B10	I

Accessoires

Aperçu	Réf.	Nom	Description	Garantie (an)	Marque
	ACC5FAE946E26ECC	Extension 50 cm	Pour borne Gamma - Extension tubulaire à emboïter	5	PIXEL Lighting
	ACC5FAE94AA0E27D	Extension 100 cm	Pour borne Gamma - Extension tubulaire à emboïter	5	Greenled PRO
-	ACC5FAE9E12D8EFE	Base de scellement béton	Pour encastrement béton uniquement - Poids : 400 g	5	PIXEL Lighting
-	ACC5FAE9E5F09CD4	Base de scellement	Pour sol meuble - Poids : 1700 g	5	PIXEL Lighting

Schéma technique

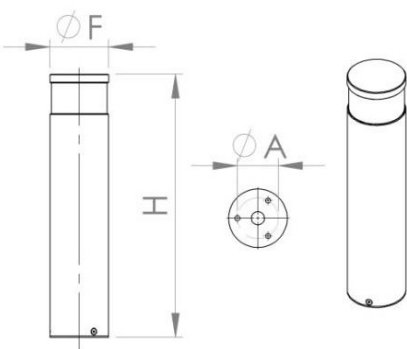


Schéma de montage

1	2
Diagram showing the cylinder being inserted into the base. An upward arrow indicates the direction of insertion. The base has three mounting holes, and the cylinder has three corresponding holes. The label "3x" indicates three holes.	Diagram showing the base with three screws being tightened. A curved arrow indicates the direction of rotation. The label "3x" indicates three screws.
3	A
Diagram showing the top cap being tightened onto the cylinder. An upward arrow indicates the direction of rotation. A screwdriver is shown tightening the cap. The label "3x" indicates three screws.	Diagram showing the final assembly. A downward arrow indicates the direction of insertion. The label "3x" indicates three holes.

Extension 50 ou 100 cm

