

FICHE TECHNIQUE

Borne Gamma

Modèle BG5FAE938837BE9

Borne Gamma 10W 520Lm Ø80*H360mm Sol IP65 IK08 180° 4000K

Code GTIN : 3760276637245



Sur commande



Nouveauté



Photo(s) non contractuelle(s).
L'apparence du produit peut être amenée à être modifiée.

Informations principales

Réf.	BG5FAE938837BE9
Marque	PIXEL Lighting
Nom produit	Borne Gamma
Type	Éclairage extérieur
Catégorie	Borne Lumineuse
Sous-catégorie	Gamma
Application(s)	Urbain, Extérieur
Variante(s)	12 variantes
Coloris	Anthracite
Dimensions	Ø80 * H360 mm
Dimensions d'installation	-
Poids	1600g


Données techniques

Puissance	10 W
Flux lumineux	520 LM
Rendement	52 LM/W
Angle de diffusion	180°
Température de couleur	4000K
Type de montage	Sol
Type de LED	SMD3030
Type de diffuseur / réflecteur	Lentille
Type de driver	CE
Usage intensif	Non
Température fonctionnement	-20° à +40° C

Normes



Performances luminaire

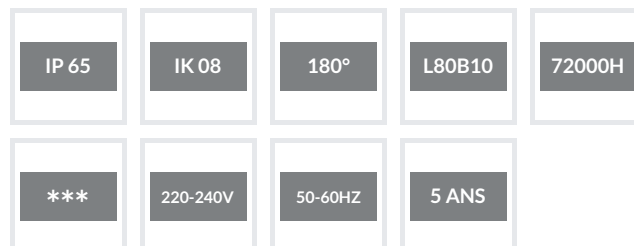

Caractéristiques

650°



COMPATIBLE
DéTECTION

DI

SDCM<3

IRC 80



THD <16%

PF 0.9

Variantes

Réf.	Puissance en W	Flux lumineux en LM	Rendement en LM/W	Angle en °	Dimensions en mm	Type de montage	Température couleur en K	IP	IK	Durée de vie en H	L / B	Classe
BK5FAE8F0EC546D	5	250	50	180°	Ø80 * H360	Sol	3000K	65	08	72000	L80B10	I
BG5FAE90BCAEF3A	5	260	52	180°	Ø80 * H360	Sol	4000K	65	08	72000	L80B10	I
BG5FAE8866A5239	5	265	53	90°/90°	Ø80 * H360	Sol	3000K	65	08	72000	L80B10	I
BG5FAE892DECB3	5	275	55	90°/90°	Ø80 * H360	Sol	4000K	65	08	72000	L80B10	I
BG5FAE85ADA963C	5	435	87	360°	Ø80 * H360	Sol	3000K	65	08	72000	L80B10	I
BG5FAE8748BE30F	5	450	90	360°	Ø80 * H360	Sol	4000K	65	08	72000	L80B10	I
BG5FAE931DF376C	10	500	50	180°	Ø80 * H360	Sol	3000K	65	08	72000	L80B10	I
BG5FAE938837BE9	10	520	52	180°	Ø80 * H360	Sol	4000K	65	08	72000	L80B10	I
BG5FAE9209D3F66	10	530	53	90°/90°	Ø80 * H360	Sol	3000K	65	08	72000	L80B10	I
BG5FAE92A82536C	10	550	55	90°/90°	Ø80 * H360	Sol	4000K	65	08	72000	L80B10	I
BG5FAE913211645	10	870	87	360°	Ø80 * H360	Sol	3000K	65	08	72000	L80B10	I
BG5FAE919D4D8F6	10	900	90	360°	Ø80 * H360	Sol	4000K	65	08	72000	L80B10	I

Accessoires

Aperçu	Réf.	Nom	Description	Garantie (an)	Marque
	ACC5FAE946E26ECC	Extension 50 cm	Pour borne Gamma - Extension tubulaire à emboîter	5	PIXEL Lighting
	ACC5FAE94AA0E27D	Extension 100 cm	Pour borne Gamma - Extension tubulaire à emboîter	5	Greenled PRO
-	ACC5FAE9E12D8EFE	Base de scellement béton	Pour encastrement béton uniquement - Poids : 400 g	5	PIXEL Lighting
-	ACC5FAE9E5F09CD4	Base de scellement	Pour sol meuble - Poids : 1700 g	5	PIXEL Lighting

Schéma technique

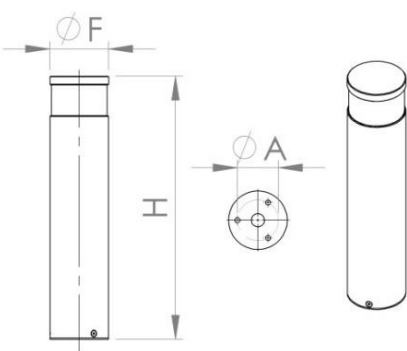


Schéma de montage

1	2
Diagram showing the cylinder being inserted into the base. An upward arrow indicates the direction of insertion. The base has four mounting holes. The cylinder has a small circular feature at the bottom. The label "3x" indicates that three screws are used to secure the base.	Diagram showing the base with four screws being tightened. A curved arrow indicates the direction of rotation. The label "3x" indicates that three screws are used to secure the base.
3	A
Diagram showing the top cap being tightened onto the cylinder. An upward arrow indicates the direction of rotation. A screwdriver is shown tightening the cap. The label "3x" indicates that three screws are used to secure the base.	Diagram showing the final assembly. A downward arrow indicates the direction of insertion. The label "3x" indicates that three screws are used to secure the base.

Extension 50 ou 100 cm

